




Limestone SGT301

|                         |                                                         |
|-------------------------|---------------------------------------------------------|
| Construction            | Multi Level Loop                                        |
| Tile Size               | 500 x 1000mm                                            |
| Yarn Type               | FITTON Premium Nylon                                    |
| Stain/ Soil Resistant   | Resistec                                                |
| Dye Method              | 100% Solution Dyed                                      |
| Tufted Face Weight      | 627gm/m <sup>2</sup> (18.5oz/yd <sup>2</sup> ) [±5%]    |
| Gauge                   | 1/10                                                    |
| Stitches per inch       | 11.7                                                    |
| Tufts                   | 117                                                     |
| Finished Pile Height    | 4.13mm (0.16") [±5%]                                    |
| Finished Pile Thickness | 2.79mm (0.11") [±5%]                                    |
| Average Density         | 6055oz/yd <sup>3</sup>                                  |
| Secondary Backing       | Sus-Pac Thermoplastic                                   |
| Total Thickness         | 7.2mm (0.284") [±5%]                                    |
| Total Weight            | 3,017gm/m <sup>2</sup> (88.97oz/yd <sup>2</sup> ) [±5%] |

Performance Specifications

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| Tuft Bind                           | ASTM D1335 > 8lbs                      |
| Hexapod Test                        | ASTM D5252 > 3.0 at 12,000 cycles      |
| Flammability (Radiant Panel Test)   | ASTM E648 ≥ 0.45 (Class I)             |
| Smoke Density                       | ASTM E662 ≤ 450                        |
| Soiling                             | ASTM D6540                             |
| Stain Resistance                    | AATCC 175                              |
| Dimensional Stability               | ASTM D7570 < 0.2%                      |
| Methenamine Pill Test               | ASTM D2859 (Self-Extinguishing)        |
| Colorfastness to Light              | (AATCC 16E) ≥ 4.0 at 80 Hours          |
| Colorfastness to Crocking           | (AATCC 165) ≥ 4.0 Wet or Dry           |
| Electrostatic Propensity            | (AATCC 134) 20% R.H., 70° F. ≤ 3.5 KV  |
| Texture Appearance Retention Rating | (TARR) Commercial End-Use Applications |
| Indoor Air Quality                  | CRI Green Label Plus™                  |

Recommended Installation Method

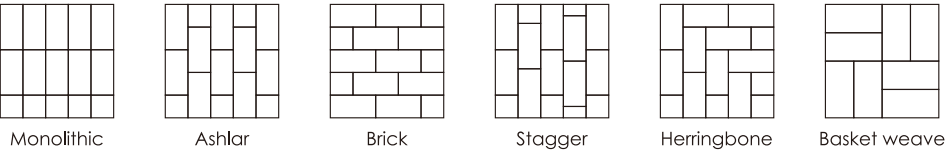

“Elevate your space with the timeless beauty of Limestone”





Limestone **SGT301**

|                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    |    |    |
| SGT301-12300<br>Light Beige<br>Gambier                                                | SGT301-12301<br>Mid Beige<br>WA                                                       | SGT301-12302<br>Dark Beige<br>Tamala                                                  |
|    |    |    |
| SGT301-12500<br>Light Cool Grey<br>Breccia                                            | SGT301-12501<br>Mid Cool Grey<br>Gascogne                                             | SGT301-12502<br>Dark Cool Grey<br>Tundra                                              |
|   |   |   |
| SGT301-12200<br>Light Warm Grey<br>Maribor                                            | SGT301-12511<br>Mid Warm Grey<br>Shale                                                | SGT301-12552<br>Dark Warm Grey<br>Marron                                              |
|  |  |  |
| SGT301-12210<br>Light Brown<br>Dondurma                                               | SGT301-12211<br>Dark Brown<br>Jura                                                    | SGT301-12600<br>Green<br>Kakadu                                                       |

Imagine stepping into a space where elegance meets nature—  
where every tile tells a story etched over millennia.  
Introducing SG Limestone flooring, bringing natural warmth and understated luxury that effortlessly transforms interiors.



With its soft, neutral palette—ranging from creamy beige and ivory to cool greys and delicate blues—Limestone offers a calming, earthy foundation that complements both contemporary and rustic styles. Its gentle tones and organic textures add a sense of serenity and refinement to your interior space.



Each Limestone tile mimics nature's masterpiece, featuring subtle veining and occasional fossilized patterns. These natural variations create rich visual interest, making your floor not just a surface, but a conversation piece.



Breccia 12500 + Gascogne 12501 + Tundra 12502



Ashlar

Limestone doesn't chase trends—it sets them.

With its timeless appeal and quiet sophistication, it brings a sense of permanence  
and enduring beauty, grounding your space in natural elegance.




Limestone brings warmth, subtle luxury, and  
a timeless aesthetic to interiors.

Jura 12211



Soft, neutral hues of limestone tiles  
make elegant, earthy floors.



Ashlar



Herringbone

